



Dimmable Surface Mount LED Downlight

Features

Product Style	LED Downlight	Power Factor	> 0.90
LED Chip	Epistar SMD	CRI	Ra > 80
Input Voltage	220 - 240V	LED Degradation	<30% after 50K hrs
System Power	8W/12W/15W/18W	Energy Saving rate	70 - 80%
Colour Temperature	3000 - 5700K	Hole Cut Out Size	Surface Mount
Luminous Flux (LM)	600 - 1782	IP Rating	54
LED Efficiency	85 - 100 LM/W	Warranty	4 years
Dimmable Driver	Yes (Triac)	Finish	White, Gold, Brushed Aluminium
Beam Angle	90°	Pre-wired driver	Yes



Characteristics

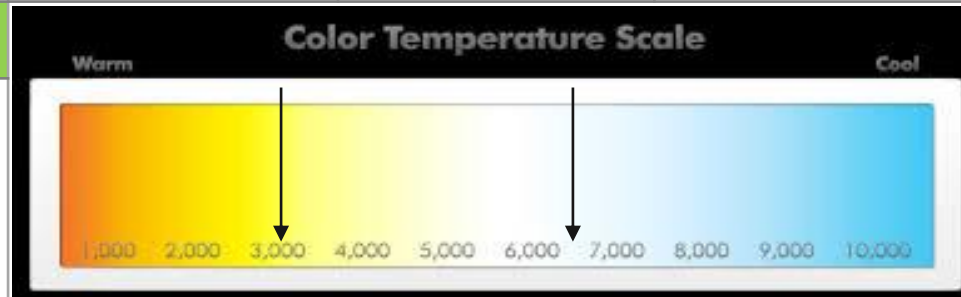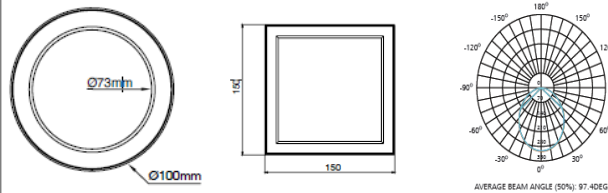

*All pricing is finalised on a project to project basis